BigTex TRAILERS

EQUIPMENT TRAILERS

www.bigtextrailers.com

10ET / 12ET

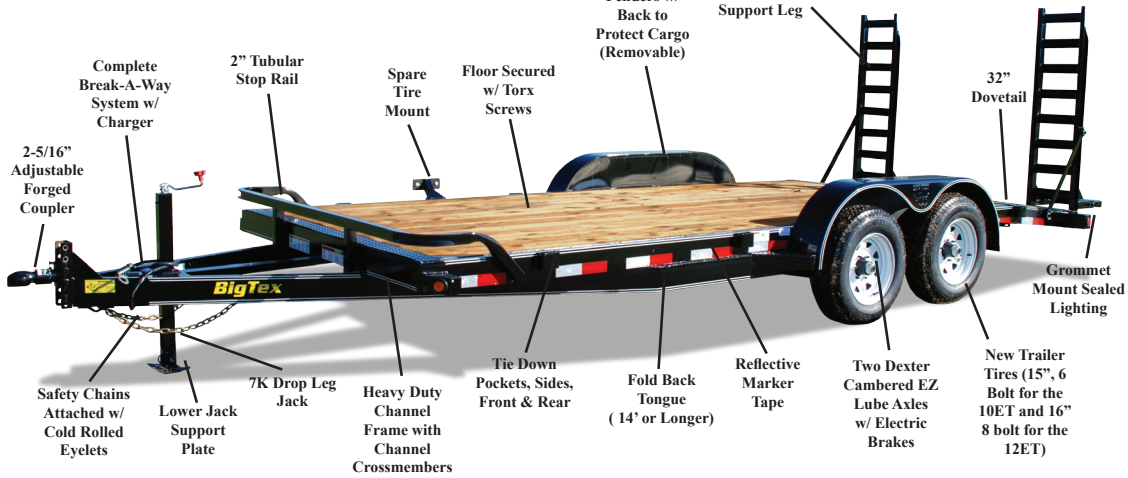

- 10ET and 12ET come in 83" width and in lengths of 16', 18', and 20'
- 10ET Approximate Carrying Capacity ranges from 7,500# - 7,690# depending on length
- 12ET Approximate Carrying Capacity ranges from 9,300# - 9,420# depending on length

Length options and flat deck provide versatility to haul light to medium duty equipment and small tractors.

10PI / 12PI

• 83" width and standard lengths of 14', 16', 18' and 20'. • 10PI Approximate Carrying Capacity ranges from 7,400# - 8,000# depending on length • 12PI Approximate Carrying Capacity ranges from 9,300# - 9,600# depending on length • 2-5/16" Forged Coupler • 10PI has 15" Tires (6 bolt), 12PI has 16" Tires (8 bolt) • 2-7/8" Pipe Square Back Top Rail

The 10PI & 12PI are perfect for hauling light to medium duty equipment and small tractors. Slide in ramps allow for easy loading and unloading of equipment.

10CC / 14CC

• 83" width and standard lengths of 16' and 18' • 10CC Approximate Carrying Capacity of 7,500# • 14CC Approximate Carrying Capacity of 11,250# - 11,400# depending on length • 2-5/16" Coupler • 10CC has 15" Tires (6 bolt) • 14CC has 16" Radial Tires (8 bolt) • 2" Tubular Stop Rail

Econo style trailer with slide in ramps and rear stabilizer stands make this trailer the perfect car carrier / entry level equipment hauler.

10EQ / 12EQ

• 83" width (79" usable width) and standard lengths of 14', 16' and 18'
• 10EQ Approximate Carrying Capacity ranges from 7,300# - 7,500# depending on length
• 12EQ Approximate Carrying Capacity ranges from 9,100# - 9,400# depending on length
• 2-5/16" Adjustable Forged Coupler • 10EQ has 15" Tires (6 bolt), 12EQ has 16" Radial Tires (8 bolt)

Trailer comes with 5' stand-up ramps with expanded metal in bottom of tongue which maximizes storage & hauling use. Perfect for light to mid range equipment and more condensed weight loads, such as a skid steer.

100A / 120A

• 102" width and in standard lengths of 16', 18', and 20' • 10OA Approximate Carrying Capacity ranges from 6,700# – 6,900# depending on length • 12OA Approximate Carrying Capacity ranges from 8,600# - 8,900# depending on length • 2-5/16" Adjustable Forged Coupler • 10OA has 15" Tires (6 bolt), 12OA has 16" Tires (8 bolt)

The extra-wide flat bed is perfect for hauling hay or for most pallet applications. Rub rail with stake pockets provide for easy tie down and safe transport of load.

10FT / 12FT / 14FT

• 83” width and in standard lengths of 16’, 18’ and 20’ • 10FT Approximate Carrying Capacity ranges from 6,800# - 7,100# depending on length • 12FT Approximate Carrying Capacity ranges from 8,800# - 9,100# depending on length • 14FT Approximate Carrying Capacity ranges from 10,430# - 10,520# depending on length • 2-5/16” Adjustable Coupler on the 10’ and 12’ • 14FT has a 2-5/16” Adjustable 14K Cast Coupler • 10FT has 15” Tires (6 bolt), 12FT - 14FT have 16” Tires (8 bolt)

This full tilt trailer offers a low load range for hard to load cars and mid range industrial equipment. Perfect for hauling low profile industrial mowers and forklifts.

10TL / 12TL / 14TL

• 83” width x 20’ for the 10TL-12TL • 14TL is 83” wide and comes in lengths of 20’ and 22’ • 6,900# Approximate Carrying Capacity for the 10TL • 8,700# Approximate Carrying Capacity for the 12TL • 14TL Approximate Carrying Capacity ranges from 10,480# - 10,520# depending on length • 2-5/16” Adjustable Coupler, Adjustable 14k Cast on the 14TL • 10TL has 15” Tires (6 bolt), 12TL - 14TL have 16” Tires (8 bolt)

Trailer offers a 4’ stationary deck for more versatile hauling and tongue weighted towing. Low load range is perfect for hard to load items such as cars, low profile industrial equipment and small bull dozers.

14PI

• 83” width and in standard lengths of 16’, 18’ and 20’ • Approximate Carrying Capacity ranges from 11,000# - 11,400# depending on length • 2-5/16” 14K Cast Coupler • 16” Radial Tires (8 bolt)

3” square tubing top rail helps to secure your load of medium to heavy duty equipment and mid size tractors. Channel slide in ramps allow for easy loading and unloading of equipment.

14ET

• 83” width and in standard lengths of 16’, 18’ and 20’
• Approximate Carrying Capacity ranges from 11,200# - 11,400# depending on length
• 2-5/16” Adjustable Cast Coupler
• 16” Tires (8 bolt)

Heavy duty frame allows for mid to heavy duty equipment hauling. 32” dovetail with 5’ stand up ramps allows for easy loading and unloading of equipment.

12GP

• 83” width and in standard lengths of 18’ and 20’
• Approximate Carrying Capacity ranges from 8,900# - 9,000# depending on length
• Gooseneck with 2-5/16” Adjustable Coupler • 16” Tires (8 bolt)

Pipe top gooseneck with 2-7/8” pipe square back top rail to help secure your load of small to medium duty equipment and small tractors. Channel slide in ramps allow for easy loading and unloading of equipment.

14GP

• 83” width and in standard lengths of 20’ and 24’
• Approximate Carrying Capacity ranges from 10,400# - 10,800# depending on length
• Gooseneck with 2-5/16” Adjustable Coupler • 16” Tires (8 bolt)

Heavy duty pipe top gooseneck has 3” square tubing on top rail to help secure your load of medium to heavy duty equipment and mid size tractors. Channel slide in ramps allow for easy loading and unloading of equipment.

12PT

• 68” width and standard lengths of 32’ and 40’
• Approximate Carrying Capacity ranges from 7,700# - 8,300# depending on length
• 2-5/16” Forged Coupler • 16” Tires (8 bolt)

Tandem axle pipe transport is perfect for oil field use and hauling extremely long items such as pipe. Comes equipped with three- 4” winches with straps and winch bar to help secure loads.

Trailers may be shown with options that are not standard. Carrying capacities may vary with options. For a complete list of all trailer specifications and features, log on to www.bigtextrailers.com.